




REOVIB 513

Track control module

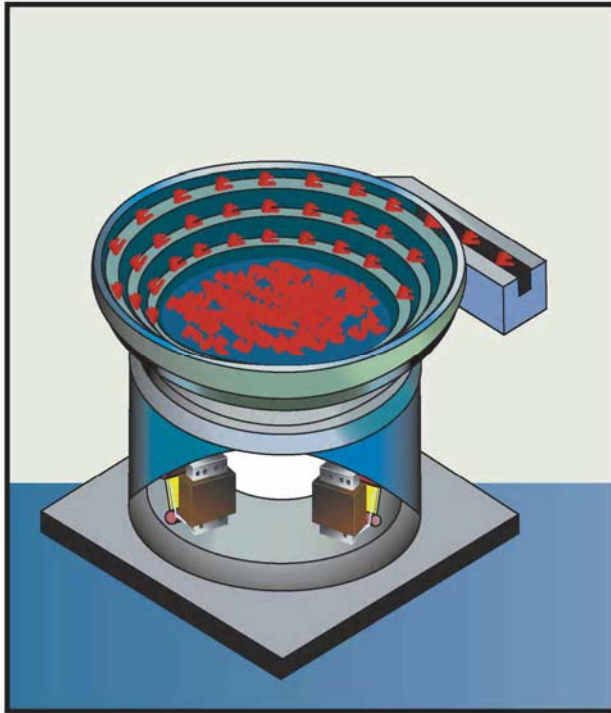

- Track control for PNP, NPN or Namur sensor types
- Invert sensor input
- ON/OFF switching time delays
- Track status indication with relay contacts or 12 VDC
- Snap-on mounting for 35 mm DIN rail



REO-USA, Inc.
3250 North Post Road, Suite 132
Indianapolis, IN 46226
Phone (317) 899-1395 Fax (317) 899-1396
Website: www.reo-usa.com Email: info@reo-usa.com



REOVIB 513

Track control module

The REOVIB 513 track control module is used for regulating the storage of products on a linear track. It can be used with nearly all conventional proximity, (active) photoelectric, and Namur type sensors. A selector switch in the front panel permits adaptation to the sensor characteristics (PNP/NPN output). Trimmers in the front panel provide adjustment of the On/Off switching delays within a range of 0.5....15 seconds. The sensor state (damped or undamped) and also the enable input state (On/Off) state both have LED indicators. In addition a relay with changeover contacts, brought out to terminals, switches at the same time as the enable output. DIN rail mounting

Type	REOVIB 513
ID-No.:	110V—51312
ID-No.:	230V—51310
Input voltage:	110V 230V +6%-10%, 50/60Hz
Sensor supply:	24 VDC
Sensor type:	PNP, NPN or Namur
On/Off switching delay:	.5—15 seconds
Status relay:	Change over 250V, 1A
Status output:	12 VDC, operation
Operating temperature:	0...+ 45 °C
Protection class:	IP 20

