





REOVIB MFS 268

Microprocessor Frequency System

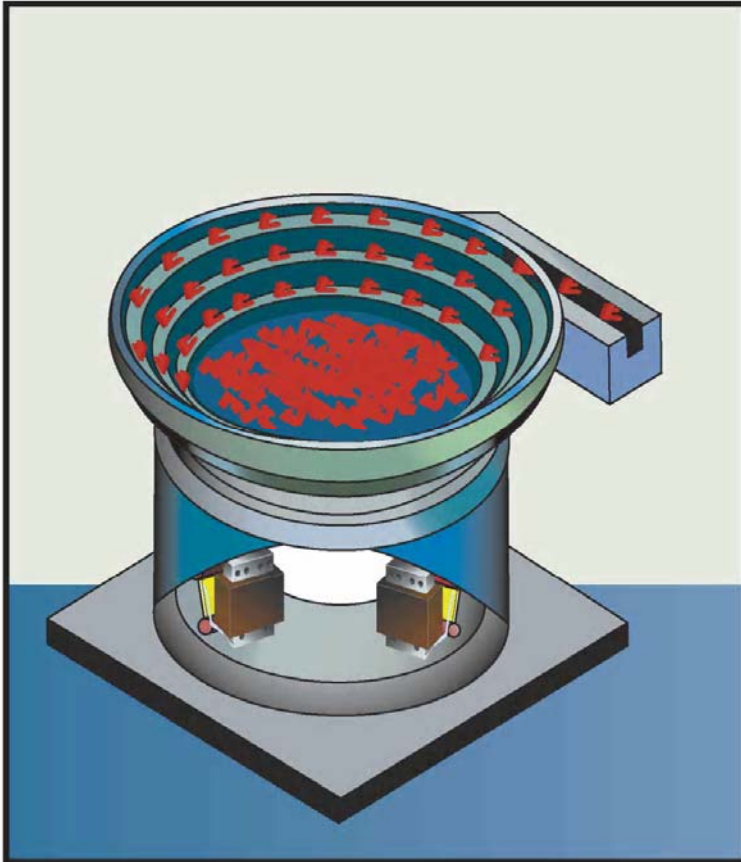

- Voltage compensation
- Suitable for 110 V and 240 V supplies
- Internal setpoint using display, external with potentiometer
- Enable input 24 VDC or contact
- Adjustable frequency range of 5...150 Hz
- Sinusoidal output current
- Automatic optimum frequency search
- Operation via LED display and keypad
- Start/Stop keys for the feeder in the touch panel
- Memory storage for user settings
- All settings can be made without opening the unit
- Integrated track control and amplitude regulation



REO-USA, Inc.
3250 North Post Road, Suite 132
Indianapolis, IN 46226
Phone (317) 899-1395 Fax (317) 899-1396
Website: www.reo-usa.com Email: info@reo-usa.com



REOVIB MFS 268

Microprocessor Frequency System

The REOVIB MFS 268 series of variable frequency regulators is specially designed for maintaining constant feed rate under various load conditions. The units produce a highly stable output frequency that is adjustable in 0.1 Hz increments. Manual “tuning” the mechanical feed system is significantly reduced. With the sinusoidal output, the feeder runs quietly and ensures gentle product handling.

Settings are adjusted by using a touch panel and an integrated digital display. The feed rate setpoint can be adjusted externally in several ways, including the use of 0...10 V or 0(4)...20 mA signals. One set of user parameters can be stored and recalled. The unit is also available with integrated track control and amplitude feedback.

Electrical connections are made via terminals in the front panel, and the unit is designed for panel mounting in a cabinet.

Type	Range REOVIB MFS 268
ID NR.:	621104
Supply voltage:	110 V, 240 V, $\pm 10\%$, 50/60 Hz
Output frequency:	5...150 Hz; depending on type, other frequency ranges are possible
Output voltage:	0...95 V, 0...205 V
Output current:	16A
Setpoint:	Internal using display External with 0...+10 VDC, 0(4)...20 mA or potentiometer 10 kW
Enable signal:	24 VDC or contact
Status relay:	Changeover contact 250 V, 1 A
Track control: (optional)	Internal power supply 24 VDC for PNP sensor
Amplitude regulation: (optional)	sensor connection: e.g. with type REOVIB SW 10
Operating temperature:	0...+45 °C
Protection class:	IP 20

