



**Type CNW 204**


Bookform filters are designed to have a small footprint so that they take up little back-panel panel space and are easy to fit. They are suitable for use with most types of inverters and provide attenuation for compliance with EMC limits EN 50081-2 (or in some instances EN 50081-1 for domestic and light industrial applications).

Voltage: 3 x 480V  
 Frequency: 50 Hz  
 Attenuation: Up to 90 dB at 500 Hz  
 Earth leakage current: <30 mA (for CNW 204/130 and 180 < 35 mA)




**Technical Information**

Standards: IEC 950 / VDE 0565-3 / UL 1283  
 Test Voltage: L-L 2100 VDC 1s / L-PE 2700 VDC 1s  
 Overload: 1.5 x Rated Current for 1min/h  
 Climatic rating: DIN IEC 68 Part 1 25/085/21

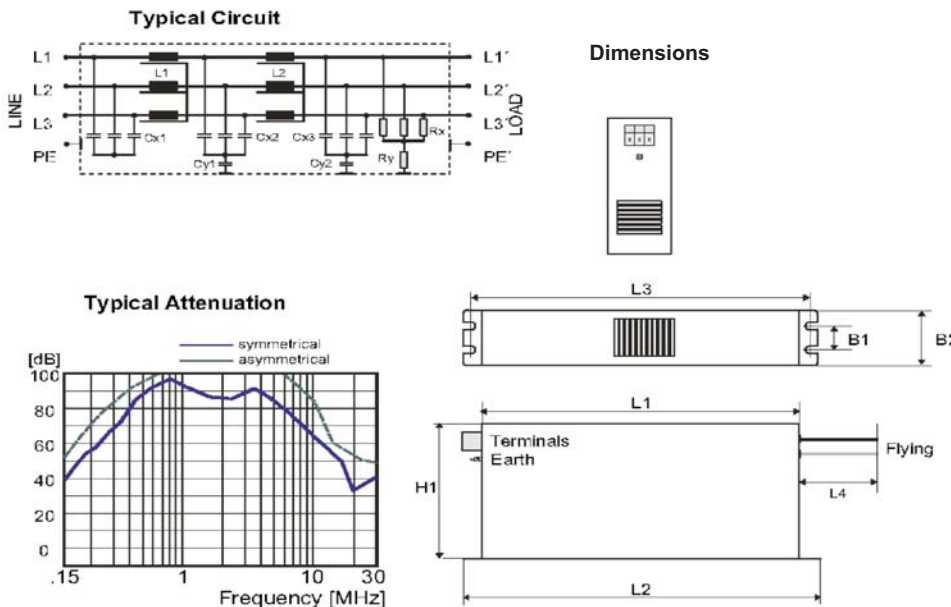

Type	Current [A]	Dimensions						Connections	
		L1 [mm]	L2 [mm]	L3 [mm]	B1 [mm]	B2 [mm]	H1 [mm]	Type	Cable option
CNW 204/7	7	225	255	240	25	50	126	2	1.5mm <sup>2</sup> x 300
CNW 204/16	16	275	305	290	30	55	142	2	1.5mm <sup>2</sup> x 300
CNW 204/30	30	305	335	320	35	60	150	3	4mm <sup>2</sup> x 400
CNW 204/42	42	300	330	314	45	70	185	4	10mm <sup>2</sup> x 500
CNW 204/55	55	300	330	314	55	80	185	5	16mm <sup>2</sup> x 500
CNW 204/75	75	300	330	314	55	80	220	5	-
CNW 204/100	100	350	380	364	65	90	220	6	-
CNW 204/130	130	400	440	414	80	110	240	6	-
CNW 204/180	180	400	440	414	80	110	240	7	-



**REO-USA, Inc.**

3250 North Post Road, Suite #132  
 Indianapolis, IN 46226  
 USA  
 Phone (317) 899-1395 Fax (317) 899-1396  
 Web site www.reo-usa.com  
 Email info@reo-usa.com

