

REOMED 600

Isolation Transformers



Unique Selling Point

- IEC 60601-1 (ed. 3.1)
- IEC 60601-1-2 (ed. 4.0)
- Certificated according to NRTL
- Optional shield winding between primary and secondary current
- Variants with filter and surge protection
- High efficiency with a very low magnetic field
- Wide range of options
- Small weight
- Short-circuit and overload protection
- Integral start-up current limiter
- Solid aluminum casing
- Equipotential bonding pin DIN 42801
- Output sockets EN 60320

Description

The TÜV-certified REOMED isolating transformers are proven and reliable equipment for use with all electrical systems in a medical environment. They reduce the leakage current and thus help to ensure the safety of patients.


REOMED isolating transformers are characterized by their very low magnetic stray-fields and reliability, whilst also providing high efficiency and easy connectivity.

Application area:

- Medical systems

Technical Data

- Rated power : 600 VA
- Input voltage : 115 - 230 V

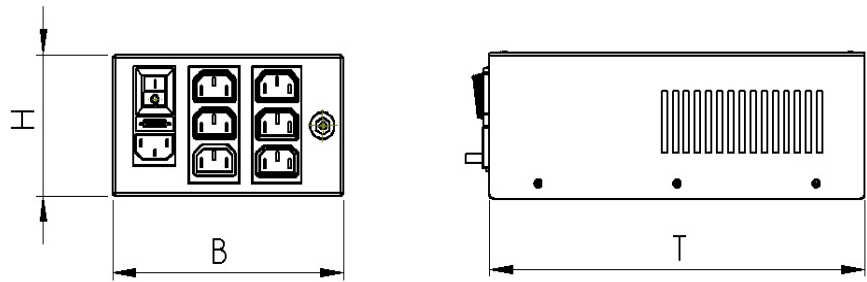

Type	H (mm)	B (mm)	T (mm)	Weight (kg)
REOMED 600	95 (100*)	170	270	7.5

*with rubber feet

REOMED 600

Isolation Transformers

REOMED	600					
Nominal input power [VA]	600	600	600	600	600	600
Input voltage [V]	115/230	230	115	115	230	115/230
Output voltage [V]	230	230	230	115	115	115/230
Mains frequency [Hz]	50/60	50/60	50/60	50/60	50/60	50/60
Input power plug	1 piece IE C/EN 60320 (C14) UL 498, CSA C22.2 no. 42					
Output power plug	6-piece IEC/EN60320-2-2 (C13) UL 498 CSA C22.2 no. 42					
Power switch [0-1]	yes	yes	yes	yes	yes	yes
Input fuse [A]	T6.3/T3.15	T3, 15	T6, 3	T6, 3	T3, 15	T6.3/T3.15
Thermal overload protection [°C]	120	120	120	120	120	120
Max. output current [A]	2.60	2.60	2.60	5.20	5.20	5.20/2.60
Output fuse [A]	-	-	-	-	-	-
Start-up current limiter	yes	yes	yes	yes	yes	yes
Standard	NTC	NTC	NTC	NTC	electronic	electronic
Earth leakage current 127/254V [µA]	<300/500	<300/500	<300/500	<300/500	<300/500	<300/500
Insulation / protection resistance [Ω]	>2M/<0.1	>2M/<0.1	>2M/<0.1	>2M/<0.1	>2M/<0.1	>2M/<0.1
Test voltage	primary-secondary.: 4kV AC; primary housing / secondary housing: 1.5kV AC					
Protection class/med. class/Type	I/I	I/I	I/I	I/I	I/I	I/I
Protection IP	IP20	IP20	IP20	IP20	IP20	IP20
Ambient temperature [°C]	0...40	0...40	0...40	0...40	0...40	0...40
Ambient air humidity [%]	Relative 30 - 75	Relative 30 - 75	Relative 30 - 75	Relative 30 - 75	Relative 30 - 75	Relative 30 - 75
Max. altitude [m/feet]	3,000/9,864	3,000/9,864	3,000/9,864	3,000/9,864	3,000/9,864	3,000/9,864
Equi-potential earthing (DIN42801)	POAG - S6/15					
Housing, Surface	Powder-coated metal - RAL 7035					
Dimensions (BxHxT) [mm/in]	170x95*x270 (*with rubber feet 100)/6.70x3.34*x10.63 (*with rubber feet 3.54)					
Weight [kg/lbs]	Last modified: 02/13/2019. All data is provided to the best of our knowledge and awareness and is subject to error and amendment. 7.5/16.5					
Approval / principles						

/	IEC60601-1:2005/AMD1:2012; ANSI/AAMIES 60601-1:2005/CR/2012 CAN/CSA C22.2 No. 60601-1:14
Conformity CE	(Medical) USA and Canada IEC60601-1-2:2014(Partly); EN/IEC 61000-3-2:2014; EN/IEC 61000-3-3:2013

Accessories (Options)

Power line	Country-specific
------------	------------------

Pull-off protection	Mechanic retaining kit
---------------------	------------------------

Mounting rails	Mounting kit (2x mounting rails, 4x hexagon screw)
----------------	--