

# REOTRON SMP-SMB

*Installation on mounting wall*



## Unique Selling Point

- Very good cos PHI of 0.95
- Power Factor Correction
- Compact dimensions
- Series or parallel connection
- Air or water cooled
- Many options of combinations for different requirements with other
- REO product ranges

## Description

The REOTRON SMP power supplies are primary switched power supplies with galvanic separation from the input to the output. They can be used as voltage, current or power regulators.

### Operation

The unit can be operated from an internal display, external control signals of 0...+10V, 0(4)...20mA or optionally by a fieldbus interface such as DeviceNet, ProfiBus, CanBus, EtherCAT, EtherNet/IP and ProfiNet protocols.

### Input devices

The device input is designed for connection to a three-phase mains 3 x 400 V, 50/60 Hz. The compliance of EMC standards is guaranteed by an input-sided PFC-mains filter.

### Design

The devices have a compact design in a 19 inch rackmount chassis and can be delivered as a installation ready control cabinet version or as a tabletop unit (lab version). The devices are air- or water-cooled.

### Connection

The SMP's are connected via screw terminals and with cooper terminal buses at high output currents. Like all REO-products, the REOTRON SMP's are also available as customized versions.

### High range of performance

The units can be combined to power supplies with higher ratings by connecting the units in series or parallel.

## Technical Data

- Output voltage : 25 - 600 V
- Output Current : 2 - 600 A
- Output power : 1000 - 15000 W
- Input voltage switchable : Eingangsspannung umschaltbar [V] V

# REOTRON SMP-SMB

*Installation on mounting wall*

## Technical Data

Type	REOTRON SMP-SMB
Input voltage:	3x400 V, +/- 10%, 50/60 Hz
Ripple p-p:	100 mV/200 mV
Setpoint Input:	0...+10 V, DC 0(4)...20 mA, Potentiometer 10 kOhm internal control over display
Actual Output:	0...+10 V, DC 0(4)...20 mA, internal control over display
Interfaces (optional)	DeviceNet, ProfiBus, CanBus, EtherCAT, EtherNet/IP, ProfiNet
Control accuracy:	1% of the nominal value (higher on request)
Rating:	24 V, DC or contact
Protection:	Cabinet installation IP 20
2 x relay status:	Changer 250 V, 1A
Efficiency:	> 85%
Cos $\Phi$ :	0.95
PFC:	0.94
Operating temperature:	0...+45 °C
Standards:	EN 50178, EN 61000-6-2, EN 61000-6-4

# REOTRON SMP-SMB

*Installation on mounting wall*

REO Series SMP-SMB	25-40	25-100	25-200	25-300	25-400	25-500	25-600
Output power [W]	0...1,000	0...2,500	0...5,000	0...7,500	0...10,000	0...12,500	0...15,000
Output voltage [V]	0...25	0...25	0...25	0...25	0...25	0...25	0...25
Output current [A]	0...40	0...100	0...200	0...300	0...400	0...500	0...600
Dimensions	S	S	M	M	L	L	L

REO Series SMP-SMB	50-20	50-50	50-100	50-150	50-200	50-250	50-300
Output power [W]	0...1,000	0...2,500	0...5,000	0...7,500	0...10,000	0...12,500	0...15,000
Output voltage [V]	0...50	0...50	0...50	0...50	0...50	0...50	0...50
Output current [A]	0...20	0...50	0...100	0...150	0...200	0...250	0...300
Dimensions	S	S	M	M	L	L	L

REO Series SMP-SMB	80-13	80-31	80-63	80-94	80-125	80-156	80-188
Output power [W]	0...1,000	0...2,500	0...5,000	0...7,500	0...10,000	0...12,500	0...15,000
Output voltage [V]	0...80	0...80	0...80	0...80	0...80	0...80	0...80
Output current [A]	0...13	0...31	0...63	0...94	0...125	0...156	0...188
Dimensions	S	S	M	M	L	L	L

REO Series SMP-SMB	150-7	150-17	150-33	150-50	150-67	150-83	150-100
Output power [W]	0...1,000	0...2,500	0...5,000	0...7,500	0...10,000	0...12,500	0...15,000
Output voltage [V]	0...150	0...150	0...150	0...150	0...150	0...150	0...150
Output current [A]	0...7	0...17	0...33	0...50	0...67	0...83	0...100
Dimensions	S	S	M	M	L	L	L

REO Series SMP-SMB	250-4	250-10	250-20	250-30	250-40	250-50	250-60
Output power [W]	0...1,000	0...2,500	0...5,000	0...7,500	0...10,000	0...12,500	0...15,000
Output voltage [V]	0...250	0...250	0...250	0...250	0...250	0...250	0...250
Output current [A]	0...4	0...10	0...20	0...30	0...40	0...50	0...60
Dimensions	S	S	M	M	L	L	L

REO Series SMP-SMB	400-2.5	400-6.25	400-12.5	400-18.75	400-25	400-31.25	400-37.5
Output power [W]	0...1,000	0...2,800	0...5,200	0...7,600	0...10,000	0...12,800	0...15,000
Output voltage [V]	0...400	0...400	0...400	0...400	0...400	0...400	0...400
Output current [A]	0...2.5	0...6.25	0...13	0...19	0...25	0...32	0...37.5
Dimensions	S	S	M	M	L	L	L


Last modified: 07/16/2018. All data is provided to the best of our knowledge and awareness and is subject to error and amendment.

# REOTRON SMP-SMB

*Installation on mounting wall*

REO Series SMP-SMB	600-2	600-4	600-8	600-13	600-17	600-21	600-25
Output power[W]	0...1,200	0...2,400	0...4,800	0...7,800	0...10,200	0...12,600	0...15,000
Output voltage [V]	0...600	0...600	0...600	0...600	0...600	0...600	0...600
Output current [A]	0...2	0...4	0...8	0...13	0...17	0...21	0...25
Dimensions	S	S	M	M	L	L	L

## Dimension drawings

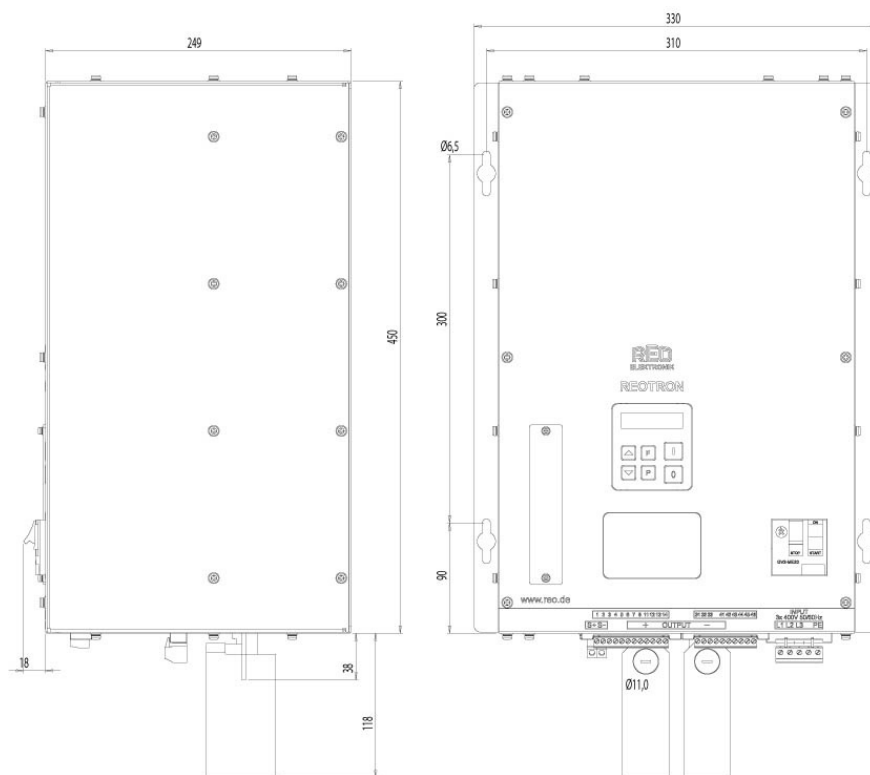

### Dimensions:

#### Small (S)

Width = 300 mm

Height = 400 mm

Depth = 230 mm

#### Medium size (M)

Width = 330 mm

Height = 450 mm

Depth = 250 mm

#### Large (L)

Width = 400 mm

Height = 480 mm

Depth= 300 mm