



REOVIB

SMART
Control unit for Vibratory Feeders

User Technical Safety Information

This description contains the necessary information for the correct application of the product described below. It is intended for use by technically qualified personal.

Qualified personnel are persons who, because of their training, experience and position as well as their knowledge of appropriate standards, regulations, health and safety requirements and working conditions, are authorised to be responsible for the safety of the equipment, at all times, whilst carrying out their normal duties and are therefore aware of, and can report, possible hazards (Definition of qualified employees according to IEC 364)

Safety Instructions

The following instructions are provided for the personal safety of operators and also for the protection of the described product and connected equipment.



Warning!

Hazardous Voltage

Failure to observe can kill, cause serious injury or damage

- Isolate from mains before installation or dismantling work, as well as for fuse changes or post installation modifications.
- Observe the prescribed accident prevention and safety rules for the specific application.
- Before putting into operation check if the rated voltage for the unit conforms with the local supply voltage.
- Emergency stop devices must be provided for all applications. Operation of the emergency stop must inhibit any further uncontrolled operation.
- **Electrical connections must be covered**
- **The earth connection must be checked, for correct function, after installation.**

Specified Use

The units described herein are electrical controllers for installation in industrial plant. They are designed for power adjustment on vibratory feed equipment.

Contents

User Technical Safety Information	1
1.0 General	2
2.0 Technical Data.....	2
3.0 Declaration of Conformity	2
4.0 Connections.....	3
5.0 Dimensions.....	5
6.0 Declaration of conformity (Electromagnetic compatibility)	6


1.0 General

Electronic control units for stepless adjustment of vibratory feeder throughput. The range of REOVIB "SMART" controllers are available as enclosed units for fitting directly onto feeding and sorting systems, or in a modular book-style form for panel mounting. The control units are suitable for feeders with a vibrating frequency of 50 Hz (60 Hz) and 100 Hz (120 Hz). The frequency is selected by using an internal link-switch on the printed circuit board. The feeder throughput can be adjusted by using either a potentiometer or analog signals 0... 10 V, DC or 0...20 mA. An enable input is available for Stop/Start operation from contacts or a supervisory control system. Vmin and Vmax trimmers are provided to limit the throughput adjustment range.

An integral soft-start reduces jolting when the unit is switched on or enabled.

The enclosed version includes mains input and feeder output cables. In the front panel there is a mains switch, fuse and throughput adjustment potentiometer. The potentiometer can be used to set the feed rate from 0...100%.

The panel mounting version is designed for fitting onto a chassis plate and all connections are made through plug-in connectors.

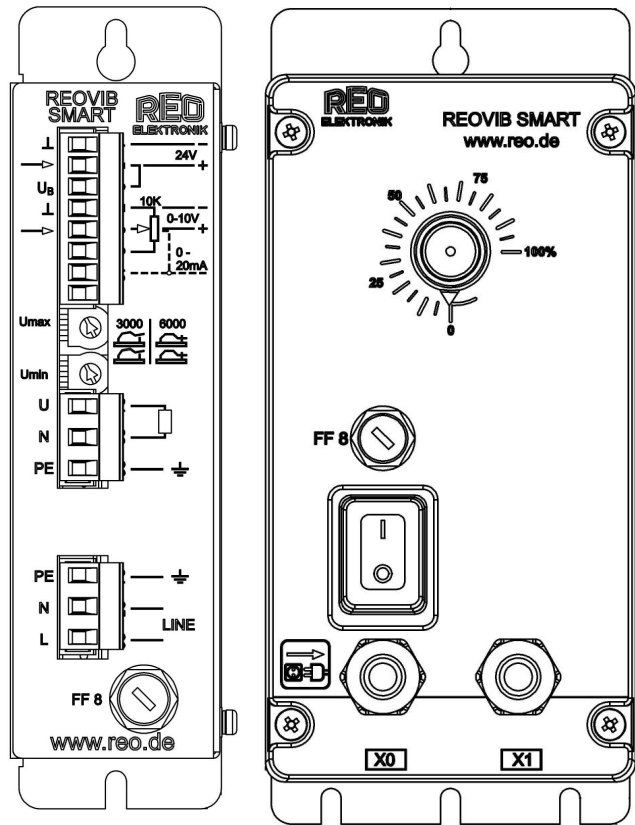

2.0 Technical Data

	REOVIB SMART B6 – E	REOVIB SMART B6 – G	REOVIB SMART B6 – E	REOVIB SMART B6 – G
Stock Code	604301	604401	604302	604402
Supply voltage	115 V, +/- 10 %		240 V, +/- 10 %	
Mains frequency	50/60 Hz		50/60 Hz	
Output voltage	20... 100 V		40... 210 V	
Output current	0,2...6 A, max.			
Vibrating frequency	3000/6000 (3600/7200)			
Set point source	Potentiometer 10 kR 0... 10 V,DC, 22 kR 0... 20 mA, 500 R			
Enable	24 V, DC, 5 mA Contacts			
Construction	IP 20	IP 54	IP 20	IP 54
Operating temperature	0... 50 °C	0... 45 °C	0... 50 °C	0... 45 °C
Storage temperature	-20... +70 °C			
Internal Fuse	FF 8 A / 250V (5x20 mm)			

3.0 Declaration of Conformity




We declare that these products conform with the following standards and directives:
EN 61000-6-4 and EN 61000-6-2 in accordance with Directive 2004/108/EC.

REO ELEKTRONIK AG, D-42657 Solingen




4.0 Connections

Enclosed version (IP54)




Connection: Internal

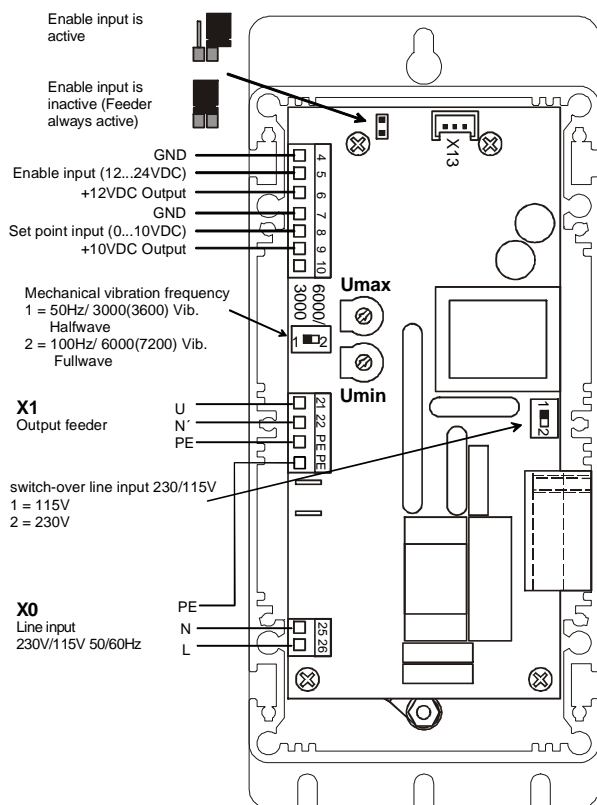

external enable




external Setpoint




Connection: Output Feeder


Output socket:

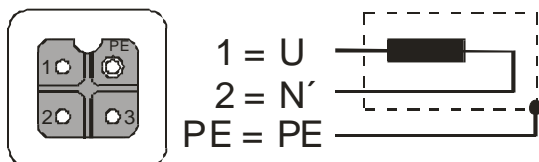

Output cable:

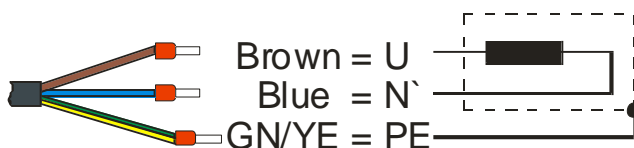


Panel mounting version (IP20)



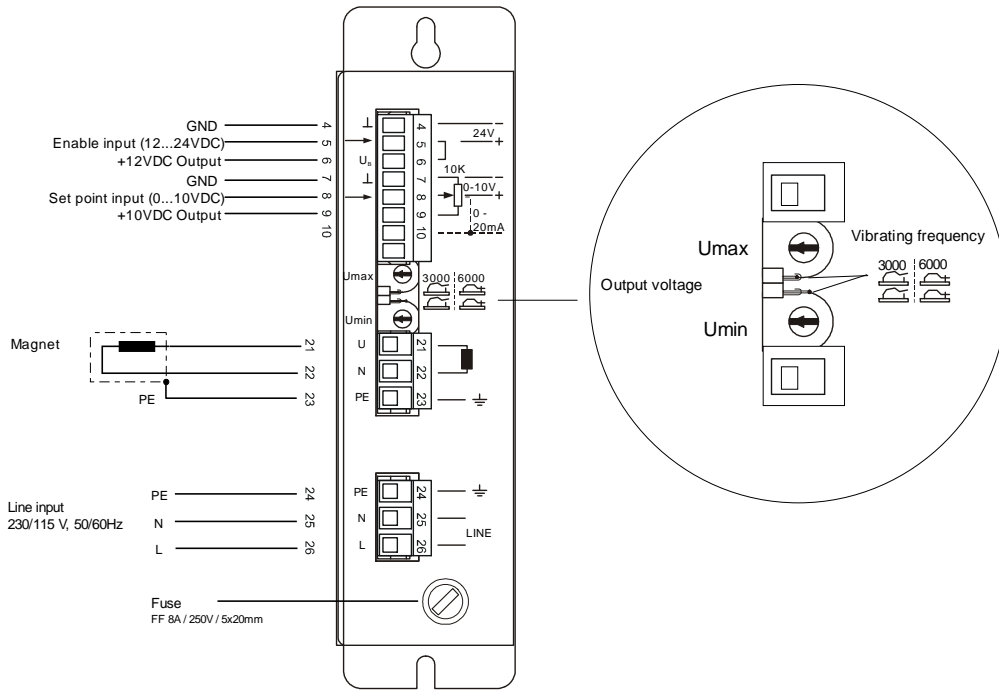


Voltage selection switch




switch-over line input 230/115V
1 = 115V
2 = 230V

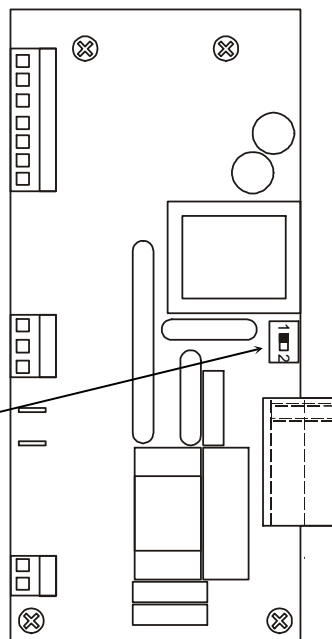

external enable




external Setpoint




5.0 Dimensions

Enclosed version (IP54)

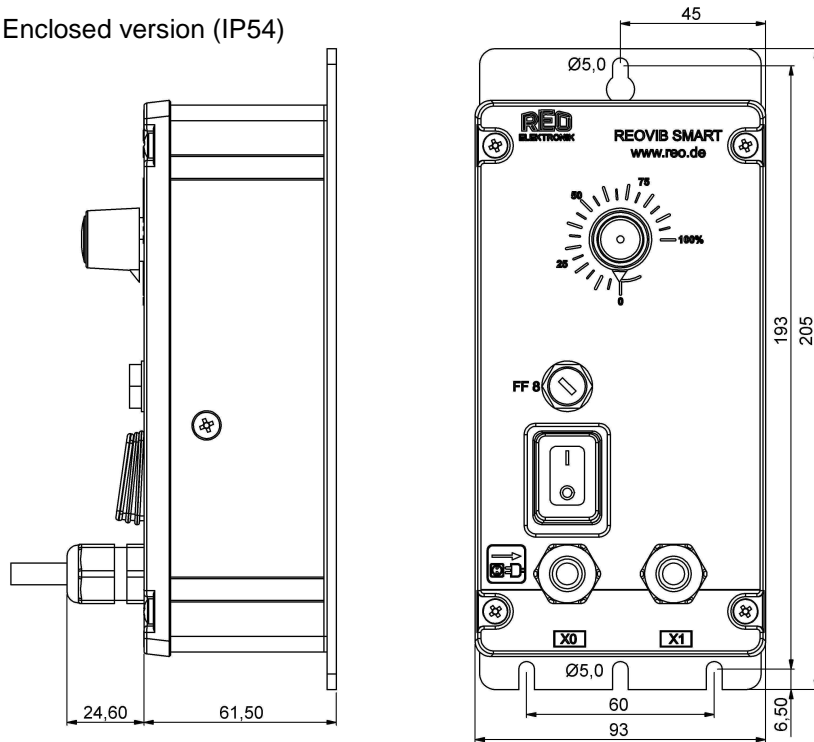

Panel mounting version (IP20)

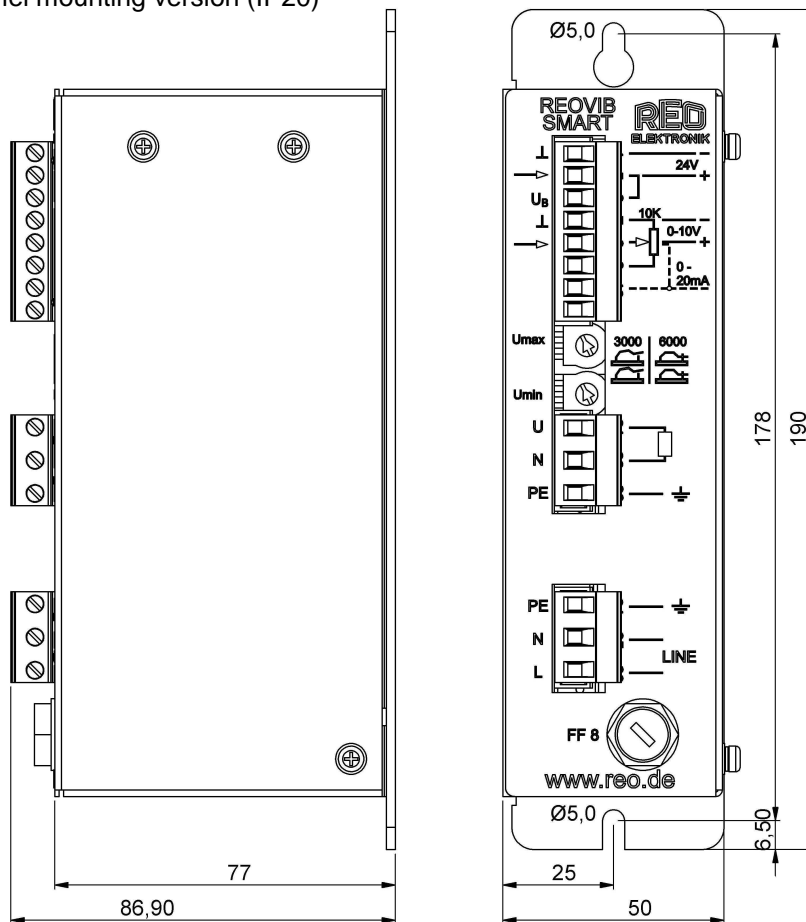

Dimensions are in [mm]

6.0 Declaration of conformity (Electromagnetic compatibility)



EG-Konformitätserklärung
Declaration of EC-Conformity
Certificat de conformité CEE

im Sinne der EG-Richtlinie „Elektromagnetische Verträglichkeit“ 2004/108/EG
as defined by the EC Directive "Electromagnetic compatibility" 2004/108/EG
comme défini par la Directive CE "Compatibilité électromagnétique" 2004/108/EG

Der Hersteller: REO ELEKTRONIK AG
The Manufacturer: Brühler Straße 100
Le Fabricant: D-42657 Solingen
Germany

erklärt hiermit, dass die folgenden Produkte
certifies that the following products
par la présente certifie que les produits suivants

Produktbezeichnung REOVIB SMART
Product designation:
Désignation du produit:

Typenreihe: 6044
Type code:
Série de modèles:

den Bestimmungen der EG-Richtlinie „Elektromagnetische Verträglichkeit“ 2004/108/EG entsprechen.
are in conformity with the requirements of the EC Directive "Electromagnetic compatibility" 2004/108/EG.
correspondent aux exigences de la Directive CE "Compatibilité électromagnétique" 2004/108/EG.

Folgende Normen sind angewandt:
The following standards are in use:
Les normes suivantes sont appliquées:

- | | |
|--------------|---|
| EN 61000-6-2 | Fachgrundnorm Störfestigkeit Industriebereich
Technical Basic Standard – Resistance to Interference. Industrial field
Norme générique-Immunité pour les environnements industriels |
| EN 61000-6-4 | Fachgrundnorm Störaussendung Industriebereich
Technical Basic Standard – Noise Emission Industrial field
Norme générique-sur l'émission pour les environnements industriels |

Solingen, 08.08.2008
(Ort, Datum der Ausstellung)
(Place, Date of issue)
(Lieu et date d'établissement)


REO ELEKTRONIK AG
Brühler Straße 100
D-42657 Solingen
Germany
Telephone (0212) 88 04-188
Telefax (0212) 88 04-188



■ REO ELEKTRONIK AG

Brühler Straße 100 · D-42657 Solingen
Tel.: +49 (0)212 8804 0 · Fax: +49 (0)212 8804 188

E-Mail: info@reo.de
Internet: www.reo.de

■ China

REO Shanghai Inductive Components Co., Ltd
No. 536 ShangFeng Road · Pudong, 201201 Shanghai · China
Tel.: +86 (0)21 5858 0686 · Fax: +86 (0)21 5858 0289
E-Mail: info@reo.cn · Internet: www.reo.cn

■ France

REO VARIAC S.A.R.L.
ZAC Du Clos aux Pois 1 · 6/8 rue de la Closerie-LISSES· F-91048 Evry Cédex
Tel.: +33 (0)1 6911 1898 · Fax: +33 (0)1 6911 0918
E-Mail: reovariac@reo.fr · Internet: www.reo.fr

■ Great Britain

REO (UK) Ltd.
Units 2-4 Callow Hill Road · Craven Arms · Shropshire SY7 8NT · UK
Tel.: +44 (0)1588 673 411 · Fax: +44 (0)1588 672 718
E-Mail: main@reo.co.uk · Internet: www.reo.co.uk

■ India

REO GPD INDUCTIVE COMPONENTS PVT. LTD
2/202 Luna Road · Village Luna · Taluka Padra
Vadodara - 391440 · India
Tel.: +91 (2662) 221723
E-Mail: info@reogpd.com · Internet: www.reo-ag.in

■ Italy

REO ITALIA S.r.l.
Via Treponti, 29 · I-25086 Rezzato (BS)
Tel.: +39 030 279 3883 · Fax: +39 030 279 0600
E-Mail: info@reoitalia.it · Internet: www.reoitalia.it

■ Poland

REO CROMA Sp.zo.o
ul. Pozaryskiego 28, bud 20 · PL-04-703 Warszawa
Tel.: +48 (0)22 812 3066 · Fax: +48 (0)22 815 6906
E-Mail: croma@croma.com.pl · Internet: www.croma.com.pl

■ Spain

REO ESPAÑA 2002 S.A.
C/Manuel Ventura i Campeny 21B · local 9 · E-08339 Vilassar de Dalt (Barcelona)
Tel.: +34 937 509 994 · Fax: +34 937 509 995
E-Mail: info@reospain.com · Internet: www.reospain.com

■ Switzerland

REO ELEKTRONIK AG
Im Halbiacker 5a · CH-8352 Elsau
Tel.: +41 (0)52 363 2820 · Fax: +41 (0)52 363 1241
E-Mail: info@reo.ch · Internet: www.reo.ch

■ Turkey

REOTURKEY ELEKTRONİK San. ve Tic. Ltd. Şti.
Halil Rifatpasa Mah. · Darülceze CD Perpa Tic Merkezi
B Blok Kat 8 No:1095 · TR-34384 Sisli – İstanbul
Tel.: +90 (0)212 2215 118 · Fax: +90 (0)212 2215 119
E-Mail: info@reo-turkey.com · Internet: www.reo-turkey.com

■ USA

REO-USA, Inc.
8450 E. 47th St · USA-Indianapolis, IN 46226
Tel.: +1 317 8991 395 · Fax: +1 317 8991 396
E-Mail: info@reo-usa.com · Internet: www.reo-usa.com